

# YOKOHAMA

[www.ymm21.jp](http://www.ymm21.jp)



## MINATO MIRAI 21 Information



Information 2024 Vol.95

Minato Mirai / Higashi-Kanagawa Waterfront Promotion Division, Urban Development Bureau, City of Yokohama  
6-50-10 Honcho, Naka-ku, Yokohama 231-0005, Japan  
Tel +81 45-671-2038 Fax +81 45-651-3164

General Incorporated Association Yokohama Minato Mirai 21  
3F. Queen Mall, Queen's Square Yokohama, 2-3-5 Minato Mirai, Nishi-ku,  
Yokohama 220-0012, Japan  
Tel +81 45-682-0021 Fax +81 45-682-4400



## CONTENTS

- Project objectives and ideal city image — P2
- Infrastructure development and city planning — P3
- Development of transportation infrastructure — P4
- Disaster-resistant urban infrastructure — P5
- Creation of bustling and lively urban spaces — P7

- Development of a charming and relaxing urban environment — P10
- Concentration of diverse functions through development of city blocks — P11
- Promotion of Area Management — P15
- History of Minato Mirai 21 — P18
- Development Map — P21


### Yokohama: Leading Japan into the Future

Since the opening of its port in 1859, Yokohama has been prosperous as a place of exchange for people, cultures and goods from around the world while cultivating an open, enterprising spirit. It is also where modernization of Japan originated and has been developing as a city that is open to the world. Even today, Yokohama is growing as an international city with a population of 3.77 million people. Yokohama has a highly developed urban environment required for business, including one of the largest international trading ports in Japan, a high degree of accessibility from various parts of the Tokyo metropolitan area such as the re-expanded, internationalized Haneda Airport, green living environment, competent human resources and the extensive market of the Tokyo metropolitan area. Not only a perfect base for business, Yokohama is a vibrant, entertaining city that is extremely popular with both domestic and overseas tourists, and a favored site for conventions. In this publication we focus on Minato Mirai 21, a remarkable initiative.

Especially, Minato Mirai 21 district is now firmly established as an outstanding business environment that also offers fascinating glimpses of history and stunning waterfront scenery. Minato Mirai 21 is already one of the strongest people magnets in Japan, and yet it is still a work in progress. Future plans include a greater focus on business and commercial entities, accompanied by innovative creation facilitated by human exchanges. Our aim is to shape an environment in which an urban culture is nurtured by making full use of the port's historical assets and the area's cultural and musical facilities.

#### Yokohama Today

Area	438.01km <sup>2</sup> [January 1, 2024]
Population	3,769,220 [January 1, 2024]
Households	1,800,100 [January 1, 2024]
Gross municipal product	14.632 trillion yen [FY2020]
Per capita income	3,316,000 yen [FY2020]
Value of trade through Yokohama Port	14.9767 trillion yen [2022]
Private business establishments	142,457 [2021]
Private-sector employees	1,527,783 [2021]
Universities and colleges	16 [December 20, 2023]
Junior colleges	2 [December 20, 2023]

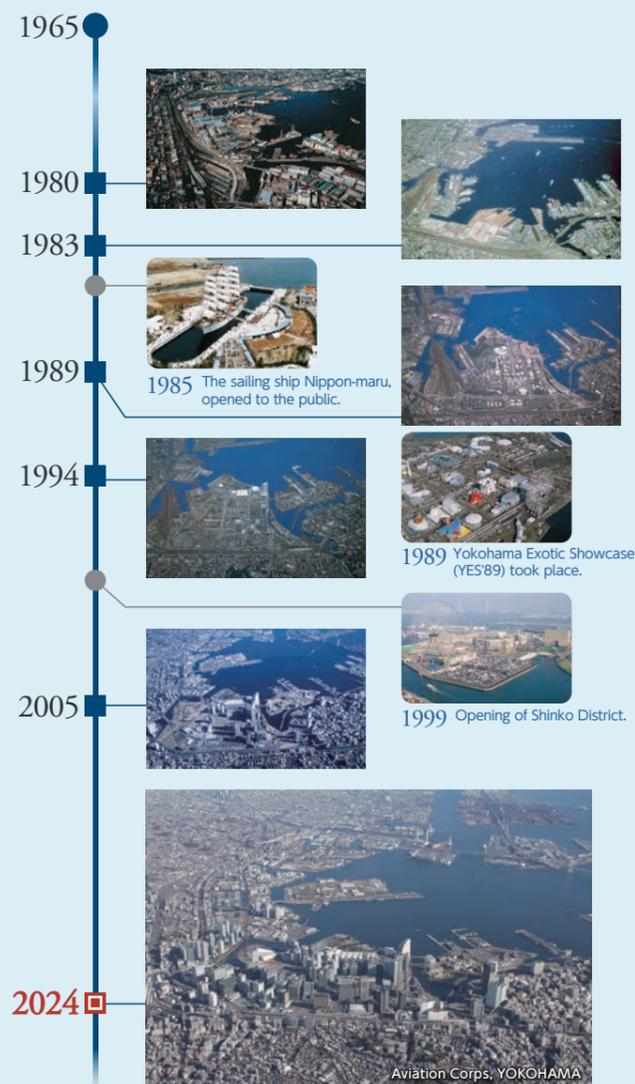

## Project Concept


"The Minato Mirai 21 Project" is a project to create a new city center along the waterfront of Yokohama. When the project was first proposed in 1965, during the period of rapid economic growth, Yokohama was experiencing growing pains from rapid residential development and population growth as a suburb of the expanding capital city of Tokyo. The downtown area of Yokohama was largely destroyed during WWII, and its subsequent requisitioning by the occupying American forces precluded the chance for any systematic rebuilding. As a result, trading companies and other businesses moved their operations to Tokyo. At the same time, the area around Yokohama Station began to flourish as a connection point for rail lines leading to suburban areas, creating a vigorously developing area separate from the old downtown districts of Kannai / Isezakicho. Yokohama thus failed to join in on the post-war recovery boom and had little choice but to become a commuter center for Tokyo. With a view to breaking this trend and creating a unique and independent city, the City of Yokohama proposed six major interlocking, strategic projects in 1965.

- ① Yokohama City Center Redevelopment Project
- ② Kohoku New Town Construction Project
- ③ Kanazawa Frontage Reclamation Project
- ④ Rapid Transit Railway (Subway) Construction Project
- ⑤ Express highway Network Construction Project
- ⑥ Yokohama Bay Bridge Construction Project

"The Minato Mirai 21 Project" is a core project of Yokohama City Center Redevelopment project.

## Yokohama City Center Redevelopment Project

The Yokohama City Center Redevelopment project aims to realize the integration and redevelopment of the Kannai / Isezakicho District, which was the original city center after the opening of the Yokohama Port, and the districts around Yokohama Station, where urbanization advanced rapidly during and after the era of rapid economic growth. Sandwiched between these two urban centers, the waterfront area was home to thriving piers and shipyards during the period of rapid economic growth, however, now that these functions have either become obsolete or been relocated, it is intended to consolidate business and other urban functions into the abandoned sites and integrate and strengthen the two city centers.

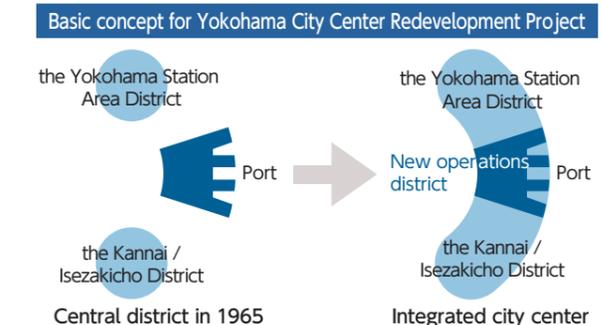

## Primary Objectives

### 1. A More Independent Yokohama

Prior to the Minato Mirai 21 project, Yokohama's city center was divided into two areas: the Kannai / Isezakicho District and the Yokohama Station Area District. Minato Mirai 21 District consolidates and integrates the two areas and concentrates the various functions of offices, cultural facilities and commercial establishments in these areas. This creates jobs and bustling recreational areas for citizens, invigorates the local economy and establishes an economic infrastructure that enhances Yokohama's self-sufficiency.

### 2. A Transformed Role for the Port

The introduction of wide expanses of parkland and green space, such as Rinko Park and Nippon-maru Memorial Park, is creating a waterfront environment where people can relax and enjoy themselves. The port also houses a variety of international conference facilities and central port administration services.

### 3. A Decentralized Capital Region

The Minato Mirai 21 project is designed to facilitate decentralization of the official, commercial and international conference functions formerly concentrated in Tokyo and to promote more balanced metropolitan development.

## Urban Vision

### 1. A Round-the-Clock Cosmopolitan Cultural City

PACIFICO Yokohama (Pacific Convention Plaza Yokohama) integrates office, cultural and commercial facilities in proximity to urban housing, enabling the area's extensive convention facilities to serve as a center for cross-cultural exchange. A lively, appealing, cosmopolitan city in tune with trends from across the globe is emerging.

### 2. A 21st Century Information City

Minato Mirai 21 is an information city, buzzing with a constant stream of economic and cultural information. It is attracting a cluster of high-tech, knowledge-intensive, global enterprises' executive HQ and R&D operations, as well as divisions of many government agencies.

### 3. An Inviting City Offering Ample Waterfront, Green Space and Heritage


Harmony between people and nature is emphasized, highlighting the waterfront's charm and treasuring green spaces. Preserving the Aka-Renga Soko (red brick warehouses) and stone docks evoking Yokohama's historical heritage, Minato Mirai 21 forms a spacious city environment framed by the sea and attractive greenery, and steeped in historical ambience.

## The Minato Mirai 21 Project Today


### Effects of the Minato Mirai 21 Project

Companies	1,930 (2023)
International conferences held	34 (2022)
Municipal tax revenues	¥21,0billion (Fiscal 2022)
Economic ripple effects toward Yokohama City	
Effects of investment in construction	¥3.4968 trillion (total) (Fiscal 1983-2020)
Effects of city operation	¥2.0846 trillion (annual) (2020)


### Transition of Visitors (Unit: Person)



### Transition of Employment and Companies

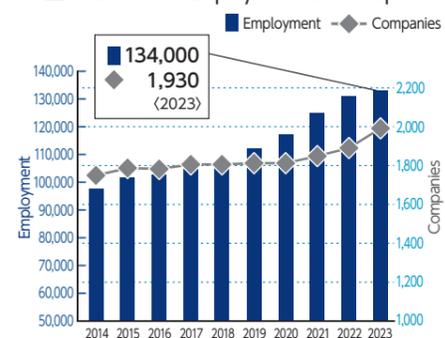


### Numbers of Passengers Using Local Railway Stations

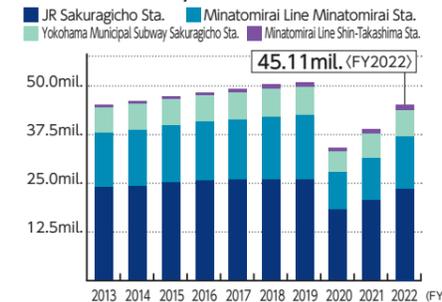

### Land Usage

Buildings (offices, commercial, residential, etc.)	87ha
Roads and railways	42ha
Parks and greenery	46ha
Port facilities	11ha
<b>Total</b>	<b>186ha</b>

### Progress of City Block Development



## Initiatives for Infrastructure Development


### Land Reclamation

The land reclamation work started in December 1983, and was largely completed by March 1998 with the successful reclamation of the Shinko area.

**Status** Central District: The Central District (59.9ha) was completed in April 1992 except for a limited area. The Takashima District (5.5ha) was completed in November 1996.

Shinko District: The Ichimonji District (7.3ha) was completed in April 1995. Area between two jetties (1.2ha) was completed in March 1939.

**Area** 73.9ha  
**Developer** Yokohama city

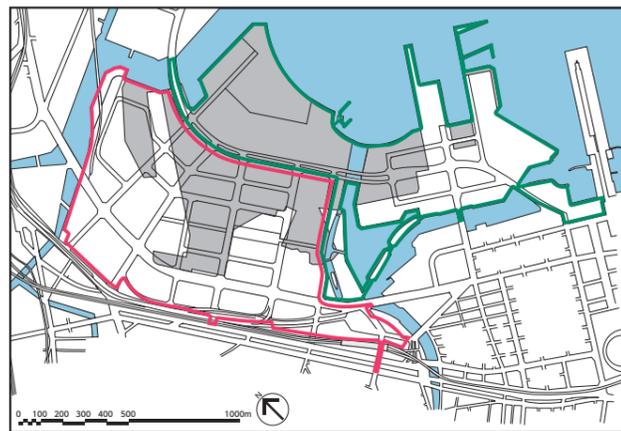

Zone	Project name	Developer
Coastal land reclamation		Yokohama city
Land readjustment		Urban Renaissance Agency (independent administrative institution)
Port facility improvement		Yokohama city, national government

### Land Readjustment

A land readjustment program was the basis for developing the Minato Mirai 21 Central District. Re-plotting was implemented in June 2006, and the readjustment program was completed by March 2011.

**Status** Work has been completed on Sakuragicho Station Square, Minato Mirai odori, Routes 1 - 6 and other roads. Grand Mall Park and other park facilities.

**Schedule Area** November 1983 to March 2011 (five-year liquidation period included). 101.8ha

**Developer** Urban Renaissance Agency (independent administrative institution)

- History**
- Nov. 1983 Construction Minister authorizes land readjustment for 35.1ha.
  - July 1987 Modification of land readjustment plan authorized (expanded to 63.4ha).
  - Jan. 1989 Modification of land readjustment plan (expanded to 74.3ha).
  - Mar. 1992 Former Takashima Yard District (21.9ha) authorized incorporated into the area.
  - Feb. 1995 Modification of land readjustment plan authorized (extended to 2003, including 5-year liquidation period).
  - Mar. 1999 Modification of land readjustment plan authorized (extended to 2010, including 5-year liquidation period; expanded to 101.6ha).
  - Sep. 2003 Modification of land readjustment plan authorized (expanded to 101.8ha).
  - Dec. 2005 Modification of land readjustment plan authorized.
  - June 2006 Land readjustment replanning announced.
  - Mar. 2011 Land readjustment completed.

### Port Facility Improvement

Port facility improvement efforts, including new green spaces, roads and other port-related facilities, are mostly complete.

**Status** The development of Rinko Park, domestic berths and other facilities has been completed except in a few areas.


**Start of work** 1983

**Area** 77.9ha

**Developers** Yokohama city, Ministry of Land, Infrastructure, Transport and Tourism

## Urban Planning (Zoning)

The objective of Minato Mirai 21 is to create a busy, attractive area that also offers employment to local citizens. Under the City Planning Law, the entire area is designated a commercial area.

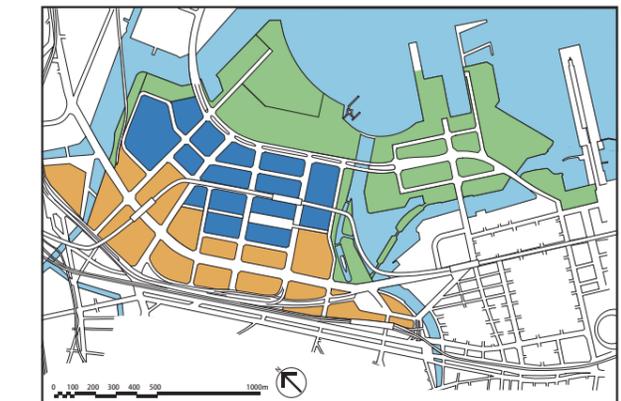

- Commercial zone: Building coverage of 80%; Capacity ratio of 800%
- Commercial zone: Building coverage of 80%; Capacity ratio of 600%
- Commercial zone: Building coverage of 80%; Capacity ratio of 400%

## Central District Plan

\*Japanese text only



To provide a firm legal status for the self-administered rules and regulations specified in the Basic Agreement on Town Development, the district plan stipulated in the Minato Mirai 21 Central District Plan was officially established in October 1989. It provides detailed guidelines for building construction, parks and other facilities, to ensure they match the distinctive character of the district.

## Shinko District Plan


\*Japanese text only



In April 1997, the Minato Mirai 21 Shinko District Plan was adopted to foster a relaxed cityscape to contrast with the futuristic clusters of towers that make up the Central District.


## Arterial Roads ~A network of roads linking the district to outer areas~

Two major arterial roads support the urban functions of Minato Mirai 21. Minato Mirai-odori Boulevard connects the district to Kanagawa Route 1 Yokohane Line. Kokusai-odori Boulevard is a split level (above and below ground) bayside road connecting the Shinko District and Yamanouchi District. Thoroughfares connecting these two major arterial roads are named for the different species of trees planted along each.

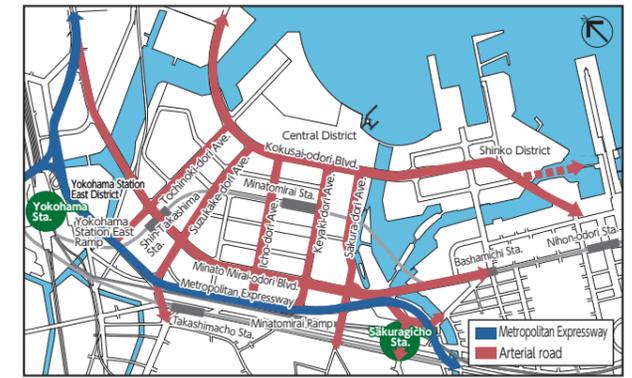

## User-Friendly Pedestrian Network

Minato Mirai 21 district contains diverse pedestrian spaces built around three main axes: the Queen Axis, which extends from Sakuragicho Station towards the seafront; the King Axis, which extends from Yokohama Station towards the seafront; and the Grand Mall Axis, which connects these two axes in the central area. In addition, pedestrian and vehicle traffic lines are separated using pedestrian decks, resulting in a pedestrian network that is both pleasant and offers good accessibility.

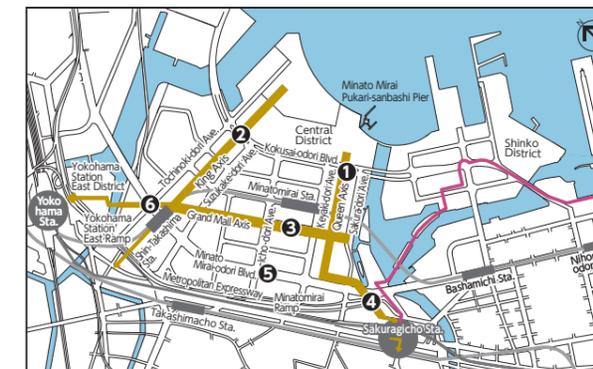

- 1 Queen Axis
- 2 King Axis
- 3 Grand Mall Axis



- 4 Moving Walkway
- 5 Minato Mirai-odori 2go Footbridge
- 6 Minatomirai-hodokyo Footbridge



Service started March 1989 Service started January 2023 Service started March 2010

Main pedestrian network Kaiko Promenade

## Diverse Traffic Modes for Enhancing Movement

### Water Traffic

Exploiting the district's waterfront location, marine access is secured in addition to land transportation. Waterbus and other services are operated out of Shinkofutosanbashi Pier and other piers.



Shinkofutosanbashi Pier

### ◆Minato Mirai Pukari-sanbashi Pier

**Complete** November 1991  
**Size** Piers: Two floating piers (with 4 berths), 70m and 50m long  
Terminal: A two-story steel-frame building with floor space of 500m<sup>2</sup>, this floating structure rises and falls about 2m twice daily with the tides

### ◆Pier Aka-Renga

**Complete** March 2004  
**Size** Pier: 50m x 8m  
Terminal: 13m x 4m

### ◆Pier Zou-No-Hana

**Complete** June 2009  
**Size** Pier: 25m x 4.5m

### ◆Shinkofutosanbashi Pier

**Complete** September 2020  
**Size** Pier: 18m x 3.5m

### Urban - Type Circular Ropeway

A ropeway linking Sakuragicho Station with Shinko Pier. This exciting alternative means of transportation allows people to get around easily while also enjoying views of Minato Mirai from 40m up in the air.



YOKOHAMA AIR CABIN

Operation start: April 2021  
Facility overview: Total length 630m, max capacity per cabin 8 people All cabins have wheelchair accessibility

### Buses

The Minato Mirai 21 District is connected directly to both Haneda Airport and Narita Airport by shuttle buses. Multiple local bus lines are in operation within the district, in addition to the Akai Kutsu buses that travel around nearby tourist spots, and the Bayside Blue articulated bus that links major waterfront facilities located between the east exit of Yokohama Station and the Yamashita Pier.



BAYSIDE BLUE

## Ground Improvement and Liquefaction Prevention

In reclaiming land and preparing ground for urban infrastructure comprising roads and residential districts in the central area of Minato Mirai 21, various ground improvement measures are implemented in consideration of earthquakes, ground subsidence and the like. Sediment of varying particle sizes offering greater resistance to liquefaction is used for reclamation work, while the ground improvement measures indicated below are also adopted:

### ● Sand Drain Method for Improving Ground in Residential Areas

This method entails creating columns of sand at uniform intervals in soft ground so that the water contained in the ground (which causes ground subsidence) can be quickly drained away in order to reduce the risk of land subsidence.

### ● Cement Deep Mixing Method for Improving Ground under Roads

This method entails strengthening ground by mixing cement and other reinforcing materials into soft ground.




## Utility Tunnels


Utility tunnels in the ground under the main traffic arteries are used to facilitate Minato Mirai 21's vital shared urban utility services. Situating these facilities under the roads effectively utilizes underground space, improves disaster-resistance and enhances the appearance of the city. These facilities were progressively installed from 1983 in the Central District as part of the Minato Mirai 21 development, and completed in 2004. Utility tunnels for electric power cables are currently being installed in the Shinko District.

**Status** The main common utility tunnel runs for approximately 7.0km under Minato Mirai-odori Boulevard, Kokusai-odori Boulevard, Icho-dori Avenue, Keyaki-dori Avenue, Sakura-dori Avenue and Sakuragi-Higashi Totsuka Route.  
**Facilities** Water pipes, communication lines, power lines, gas pipes, district heating and cooling ducts, etc.  
**Developer** Yokohama city

### Direct burying and overhead line methods



### Utility tunnel method



When a utility tunnel is constructed




**Utility tunnels** (Green) Area developed  
**Electric power cable tunnels** (Pink) Area currently served  
 (Yellow) Area planned for development

## District Heating & Cooling System

Minato Mirai 21 district has adopted a districtwide cooling and heating system that centralizes the production, supply, and control of cold and hot heat sources for air-conditioning in buildings, thereby improving energy efficiency and realizing a safe urban life that is resistant to urban disasters. As the largest district cooling and heating system in Japan, multiple plants are connected by regional conduits installed in utility tunnels, and higher level energy utilization is advanced through improving environmental performance based on the prioritized operation of state-of-the-art equipment, enhancing supply reliability based on mutual backup between plants, and so on. As urban development progresses, new plants are being constructed within the Central District 52 Block Development Project plan in response to future stable supply needs, equipment renewal, etc.

**Status** The central plant and second plant are operating.  
**Start of heating service** April 1989  
**Area served** 105ha \*  
**Service area capacity**  
 ◆Center Plant (Block 31)  
 6 floors above ground, 1 basement  
 Floor space: 11,000m<sup>2</sup>  
 Cooling capacity: 21,598RT \*  
 Boiler capacity: 165.5t/h \*  
 ◆Second Plant (Block 24)  
 Basement floors 4-5  
 Floor space: 10,000m<sup>2</sup>  
 Cooling capacity: 46,600RT \*  
 Boiler capacity: 148.0t/h \*  
 \*As of end of March, 2024  
**Developer** Minato Mirai 21 District Heating and Cooling Co., Ltd.



## High Tide and Tsunami Countermeasures

The following measures to address high tides and tsunami in rivers and Yokohama Port have been incorporated into Minato Mirai 21 district.


- **Revetment height: 2.7m~3.1m above sea level**
- **Height of residential land: 3.1m~5.0m above sea level**

Furthermore, considering the forecast level of inundation in the event of the largest predicted tsunami, numerous signs showing height above sea level have been erected, and tsunami evacuation information boards and a tsunami warning communication system have been established to facilitate prompt evacuation.

\*For details of the regions predicted to be flooded by potential tsunami activity, please see the "Guidelines for Evacuation from Tsunami" on the Yokohama City homepage




▶ Concerning Tsunami Evacuation Measures  
 \*Japanese text only

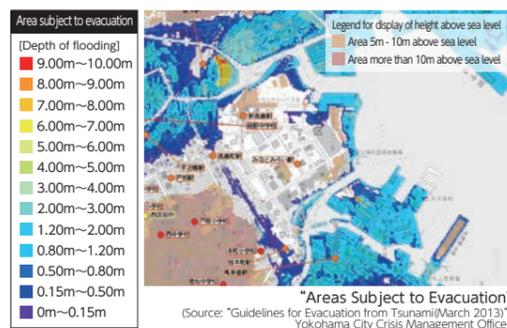

## Yokohama Maritime Disaster Prevention Base ①

This facility responds to marine disasters in Tokyo Bay and throughout the Kantoregion. It also serves as a base for rescue work and other emergency activities after a marine disaster.

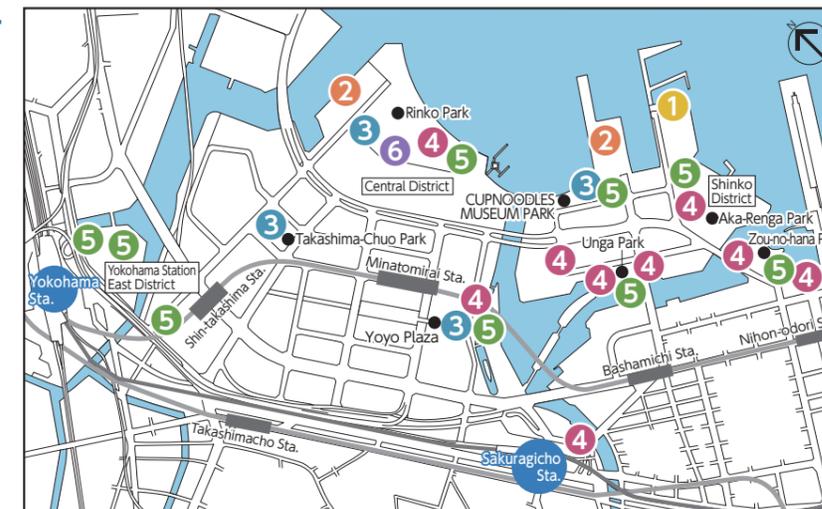

Disaster prevention facility installation location

## Earthquake-Resistant Quays ②

Earthquake-resistant quays are facilities that can receive ships carrying goods for everyday life or passenger ships at normal times. During times of emergency, such as after an earthquake, they can also act as transportation for emergency supplies.

**Facility Name** Minato Mirai Earthquake-Resistant Quay 1 / Earthquake-Resistant Quay 2  
**Status** The area behind it can be used as a temporary heliport.  
**Start of work** FY 1985  
**Water depth** -7.5m  
**Quay length** 260m  
**Developers** Yokohama city, Ministry of Land, Infrastructure, Transport and Tourism

**Facility Name** Shinko Wharf Quay 9  
**Status** Shares the Shinko Pier Cruise Terminal.  
**Start of work** 2014  
**Water depth** -9.5m  
**Quay length** 260m  
**Developers** Yokohama city




## Emergency Underground Water Tanks ③

Underground drinking water storage tanks, in which inflow and outflow valves close when the water pressure goes down, are connected to the public water supply system via regular water service pipes.

Minato Mirai 21 district has four large-sized water tanks capable of supplying drinking water to 500,000 people for three days in the event of a disaster.

**Locations** Yoyo Plaza : 1,000m<sup>3</sup> tank (completed 1993)  
 Rinko Park : 700m<sup>3</sup> tank (completed 1994)  
 CUPNOODLES MUSEUM PARK : 1,300m<sup>3</sup> tank (completed 2000)  
 Takashima-Chuo Park : 1,500m<sup>3</sup> tank (completed 2005)  
**Storage** 4,500m<sup>3</sup> (total area)  
**Developers** Yokohama city, Urban Renaissance Agency (independent administrative institution)



State at the time of installation

## Signs showing height above sea level (all over the area)

Displaying height above sea level throughout the area serves to make people conscious of height in relation to sea level and enhance their awareness regarding evacuation and disaster prevention in the event of disaster.



## Tsunami Evacuation Information Boards ④

Tsunami evacuation information boards have been installed to inform people about where they should evacuate to from their current location and to assist them in conducting prompt and appropriate evacuation behavior.



## Tsunami Warning Communication System ⑤

In the event where tsunami is expected to occur, this is a system of using loudspeakers to urge people to evacuate as quickly as possible.



## Disaster Provisions Stores ⑥

Disaster provisions stores manage stockpiles of supplies for people who cannot easily return home after a disaster.



## Basic Agreement on Town Development



In 1988, the Basic Agreement on Town Development under Minato Mirai 21 was signed between Central District landowners and other parties. The aim was for landowners to take the initiative in formulating rules for urban development, and then to share this basic philosophy in order to achieve balanced development. The agreement covers themes for urban development, vision for land use, and the following matters:

- Water and greenery
- Skyline, street scenery and vista
- Common space (active placement of public art, etc.)
- Activity floor
- Tone, and advertising structures
- Car and bicycle parking areas



With regard to buildings, it sets standards for minimum site scale, height, pedestrian networks and setback of exterior walls. In addition, it stipulates the urban management systems needed for advanced information services, disaster prevention, environmental support, and for smooth integration with adjoining urban districts.

## Skyline

The Central District of Minato Mirai 21 features a highly attractive urban skyline. In line with the urban framework, super-high-rise buildings are arranged in such a way that they form landmarks, and as an overall trend, the buildings gradually become lower moving from inland towards the waterfront. Moreover, scenic views looking towards the ocean are arranged from the main vista points and buildings are constructed in such a manner that one can sense the presence of the ocean and port from even inland parts of the city.



## Common Space

Common spaces are provided in all parts in order to create a bustling and abundant urban area. These common spaces are the intermediate areas that connect public spaces and buildings and are freely accessible to people. Such spaces are created in various ways in each facility by means of walk-through corridors, inner courtyards, open ceiling spaces and so on. Moreover, over 80 pieces of public art have been established in the area. These artworks help to create diversely expressive, friendly, and original spaces and nurture a richer culture.




MM Grand Central Tower




MM Park Building  
Minatomirai Center Building


## Land Use Vision

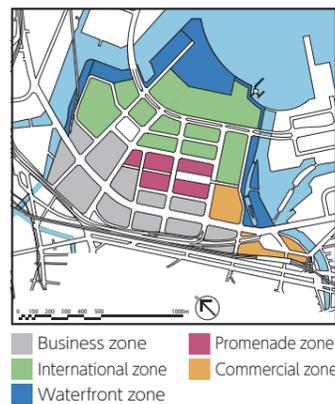

## Building Height Limits

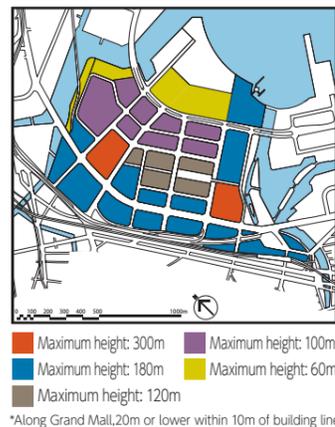

\*Along Grand Mall, 20m or lower within 10m of building line

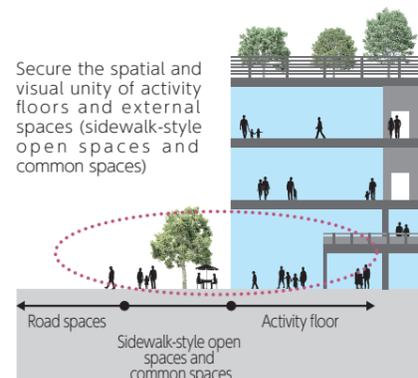

## Activity floor


In order to enhance local vitality in the area, all buildings have activity floors on lower levels. Occupied by shops, showrooms, service facilities and other spaces that people are free to use, these activity floors serve to create a human-scale townscape while maintaining the continuity of the local vibrant atmosphere.



Shiseido Global Innovation center (S/PARK)

## Pedestrian Network

Attractive pedestrian ways connecting each block have been established to create a network of pedestrian spaces in the city center. The network is built around three main axes: the Queen Axis, which extends from Sakuragicho Station towards the international conference center; the King Axis, which is a verdant open mall designed with consideration given to the ocean view; and the Grand Mall Axis, a wide and verdant open mall that intersects and connects these two routes. Moreover, to generate greater urban activity, numerous attractive facilities are established on an activities floor in parts adjacent to the pedestrian network.

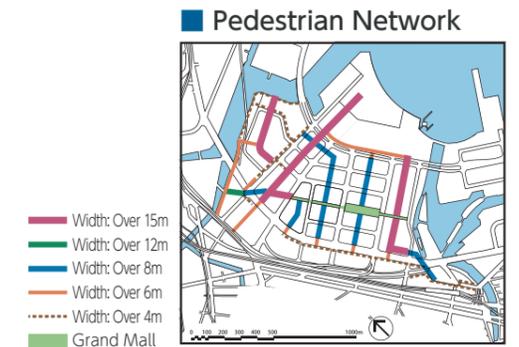

## Guidelines for the Urban Landscape of the Central District




The aim is to improve the urban landscape in accordance with rules outlined in the Landscape Plan under the Landscape Act and the Urban Landscape Conference Zone in the Ordinance Governing the Creation of an Attractive Urban Landscape in Yokohama City. The basic topic headings are:

- Activity floor
- Pedestrian spaces
- Common space
- Parking areas
- Bicycle parkings
- Associated facilities, etc.
- Color
- Night-time lights
- Architectural design
- Skyline
- Roadside landscape
- Outdoor advertising
- Promoting activity




## Area in question



— District covered by the guidelines  
 ■ Minato Mirai-odori Blvd. District  
 ■ Important parks for urban landscape  
 ■ Wall position restrictions  
 ■ Important facilities for harbor landscape

## Rules for Minato Mirai-odori Blvd. District



In sites facing Minato Mirai-odori Boulevard, where structures are 60m or higher, any parts of these structures taller than 31m must have the exterior walls set back at least 4m from the road boundary.

# Yokohama Station East District



## Transport Hub

Yokohama Station East block was developed as a transport hub directly connected to Yokohama Station, which is a key terminal station in the metropolitan region. Bus terminal functions are concentrated in Yokohama Sky Building, while Yokohama City Air Terminal (YCAT) connects Yokohama to Haneda Airport, Narita Airport, and numerous other locations in Japan. This district is also a terminal for local bus services.



YCAT

## Excite Yokohama22

The area around Yokohama Station, including Yokohama Station East blocks, is undergoing "urban development befitting the gateway of an international city" based on Excite Yokohama 22, which was compiled in 2009 as a plan for further advancing internationalization and environmental initiatives and making the station area more attractive and resilient in the event of a disaster and so on.

## Redevelopment that Respects History and Scenery

The Shinko District connects Minato Mirai 21's Central District with the Kannai-Yamashita District, whose history stretches back to the earliest days of Yokohama's port. The Shinko District was first developed in the early 20th century to house Japan's first modern port. Landmark structures like the Aka-Renga Soko (red brick warehouses) and stone pavements still attest to this legacy. While carefully preserving its historical monuments and port scenery, the Shinko District is being upgraded with facilities to support its port-related businesses and open spaces to make the most of the tranquil waterfront setting.

## Shinko Area Vision

The Shinko District has many distinctive features, from its numerous preserved historical landmarks to its island geography. Therefore, in contrast with the intensive land use and futuristic concept seen in the Central District, the Shinko District is pursuing a more relaxed streetscape that evokes the port and its history with the following themes:

### 1. Realizing a "Fun" City

We will proceed with the creation of a city overflowing with activity and fun, including operation of the port related facilities that support our 21st century port, facilities that contribute to the promotion of trade and international exchange, and green spaces that take advantage of our history and quiet inland waters to link our citizens and the port together.

### 2. Realizing a "Kind" City

We will proceed with the creation of a city that is kind to all who live there, including the creation of wide walkways with few height differences so that people may stroll at their leisure and in comfort, a promenade that runs around the waterfront, and the placement of easy to understand information signage.

### 3. Realizing a "Beautiful" City

We will create a beautiful city space, overflowing with an appeal that takes both history and the scenery into account in order to depict the perfect port-town vistas.

## Guidelines for the Urban Landscape of the Shinko District

In order to create an attractive cityscape, a set of guidelines has been established based on the Landscape Plan under the Landscape Act and the Urban Landscape Conference Zone in the Ordinance Governing the Creation of an Attractive Urban Landscape in Yokohama City.

### 1. Cityscape


- Design streets and buildings to evoke a sense of continuity, open to the sea.
- Create a pleasant, open waterfront and shoreline.

### 2. History


- Preserve sightlines of the area's historic symbol, the Yokohama Red Brick Warehouses.
- Limit building height and ensure design consistency to respect the historical nature of the area.

### 3. Island


- Create a sequential scenery, making use of the area's historical and port-like qualities.
- Create an enjoyable urban environment that encourages strolling.
- Design in consideration of the views of the area from surrounding higher areas.



### Land Use Plan

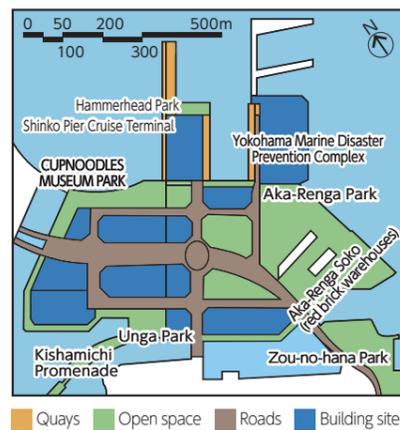

### Building Height Limits under District Plan

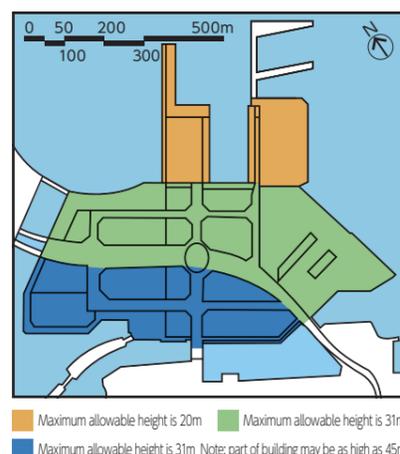


\*Japanese text only



## Green Space Network

Minato Mirai 21 makes use of its waterfront location with numerous green spaces linked by promenades to showcase the special features of the waterside environment. Including Grand Mall Park at the heart of the Central District, a green network covering the whole of Minato Mirai 21 is taking shape. Efforts are also made to create greenery that reminds people of the four seasons and nature throughout the entire area based on a program of high-level greening in and around roads and other public spaces and facilities.

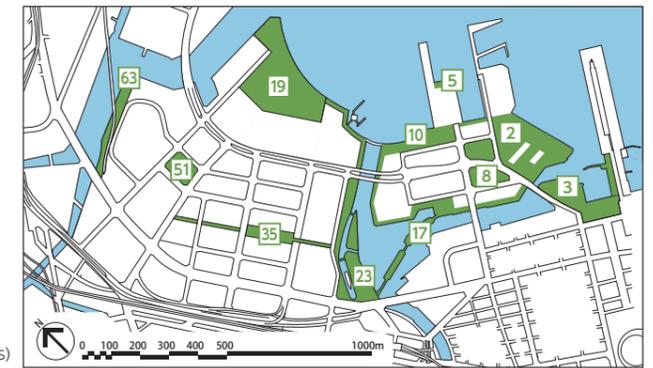

## Parks / Green Areas

### 2 Aka-Renga Park

- 1989
- April 2002
- 5.7ha
- The preserved platform of the former Yokohama Minato Station, ruins of the old Yokohama Customs Office, lawn space, parking lot, etc.
- Yokohama city

### 3 Zou-no-hana Park

- 2006
- June 2009
- 3.3ha
- Rest houses (Zou-No-Hana Terrace), lawn space, terraced embankments, breakwaters, etc.
- Yokohama city

### 5 Hammerhead Park

- 2018
- August 2020
- 0.27ha
- Open space, deck, Hammerhead Crane, etc.
- Yokohama city

### 8 Shinko Central Park

- 2001
- June 2005
- 1.1ha
- Open space, etc.
- Yokohama city

### 10 CUPNOODLES MUSEUM PARK

- 1998
- April 2001
- 2.1ha
- Lawn space, terraced embankments, Glamping facility, emergency underground water tanks, etc.
- Yokohama city

### 17 Kishamichi Promenade / Unga Park

- Kishamichi Promenade
- 1995
  - July 1997
  - 1.0ha (length: 500m)
  - Garden path along former railway bed, truss bridge, etc.
  - Yokohama city
- Unga Park
- 1998
  - September 1999
  - 1.0ha
  - Lawn space, water square, promenade, etc.
  - Yokohama city

### 19 Rinko Park

- 1988
- March 1989 (partly)
- 9.3ha
- Lawn space, terraced embankments, tidal basin, parking lots, refreshment / newsstand, emergency underground, water tanks, etc.
- Yokohama city

### 23 Nippon-maru Memorial Park

- 1984
- April 1985 (partly)
- 5.5ha
- Sail Training Ship Nippon-maru (length: 97m, width: 13m, draft: 8m) Former First Dock of Yokohama Dock Co., Ltd. Yokohama Port Museum, lawn space, shops, etc.
- Yokohama city

### 35 Grand Mall Park

- 1987
- November 1999
- 2.3ha (Total length: 700m, width: 25m standard, 55m maximum)
- Facilities Circular Square, Yoyo Plaza, Art square, Cross Patio, Emergency Underground water tanks, etc.
- Yokohama city, Urban Renaissance Agency (independent administrative institution)

### 51 Takashima-Chuo Park

- March 2006
- July 2007
- 1.4ha
- Lawn space, event space, playground, mist fountain, emergency underground water tanks, etc.
- Urban Renaissance Agency (independent administrative institution)

### 63 Takashima Suisaisen Park

- October 2010
- May 2011
- 1.3ha
- Lawn space, terraced embankments, tidal basin, etc.
- Urban Renaissance Agency (independent administrative institution)

(Legend)

- 00 City block Nos.
- 1) Year of starting work / operation
- 2) Open 3) Area 4) Facilities
- 5) Developers

## Green Rooftops, Walls and Public spaces

Promotion of greening of private land is also ongoing within the area, with proactive greening of rooftops, walls and public spaces continuing apace. These measures can not only be expected to alleviate the heat island effect, cool the environment inside rooms, reduce energy consumption, and protect buildings and structures, but also bring a soothing emotional effect to pedestrians.

### Rooftop greenery



MARK IS minatomirai

### Wall greenery



Yokohama World Porters

### Public space greenery



Minatomirai Center Building

## Historical Heritage

■ Important Cultural Property

■ Yokohama City Certified Historical Structure

In addition to passing on valuable historical heritage to future generations, local historical assets are utilized to build attractive landscapes and create a walkable urban area.

- Sail Training Ship Nippon-maru and Nippon-maru display dock (Former First Dock of Yokohama Dock Co., Ltd.) ■
- Aka-Renga Soko [Red Brick Warehouses] ■
- Dockyard Garden [Former Second Dock of Yokohama Dock Co., Ltd.] ■ ■
- Kishamichi Promenade [former coastal line dead track embankment and three truss bridges (including the former Ookagawa Bridge)] ■
- Ruins of the Old Yokohama Customs Office, rail track, and turntable ■



Dockyard Garden



Sail Training Ship NIPPON MARU

# Concentration of diverse functions through development of city blocks / Central District

(Legend) 00 00 City block Nos. ※ "○" marks indicated provisional facilities CASBEE CASBEE Yokohama S rank

ZEB Evaluation of ZEB Under construction Planned 1) Start of work 2) Open 3) Complete 4) Site area 5) Floor space 6) Structure 7) Facilities 8) Developers 9) Operator (\*)Provisional name

## 18-20-22 PACIFICO Yokohama / PACIFICO Yokohama North

- PACIFICO Yokohama
  - 1) December 1988
  - 2) Conference Center: July 1991 (hotel: August, Exhibition Hall: October, National Convention Hall of Yokohama: April 1994)
  - 4) 51,000m<sup>2</sup> 5) 167,700m<sup>2</sup>
  - 6) National Convention Hall of Yokohama: 7 stories(1 basement) Exhibition Hall: 4 stories(2 basements) Conference Center: 7 stories(1 basement) Hotel: 31 stories(1 basement), 140m
  - 7) National Convention Hall of Yokohama: Large National Hall (seating up to 5,002), Marine Lobby, etc. Exhibition Hall: Exhibition Hall (pillar-free construction), Annex Hall, restaurants, etc. Conference Center: Main Hall: 1,000 seats, conference rooms, restaurants, etc. Hotel: InterContinental Yokohama Grand(594 guest rooms), banquet halls, restaurants, etc.
  - 8) Ministry of Land, Infrastructure, Transport and Tourism, Pacific Convention Plaza Yokohama Corp.
- PACIFICO Yokohama North CASBEE
  - 1) August 2017
  - 2) April 2020
  - 4) 21,000m<sup>2</sup>
  - 5) 46,300m<sup>2</sup>
  - 6) 6 stories(1 basement), 36m
  - 7) Multi-Purpose hall, conference rooms, etc.
  - 8) Yokohama city, YOKOHAMA GLOBAL MICE, Inc.
  - 9) Pacific Convention Plaza Yokohama Corp.
- Yokohama International Organizations Center [Organizations]
  - ITTO
  - IUC for Japanese Language Studies
  - WFP Japan Relations Office
  - FAO Liaison Office in Japan
  - YOKE
  - CITYNET Yokohama Project Office
  - IFAD Liaison Office in Japan
  - Y-PORT Center Office



## 19 RINKO PARK PROJECT(\*)

- 1) March 2024
- 3) FY 2025 (planned)
- 4) 1,500m<sup>2</sup>
- 5) 55,500m<sup>2</sup>
- 6) 3 stories, 14m
- 7) Shops
- 8) RINKO PARK PROJECT TEAM



## 32 OCEAN GATE MINATO MIRAI

- 1) October 2015
- 2) December 2017
- 4) 7,000m<sup>2</sup>
- 5) 55,500m<sup>2</sup>
- 6) 15 stories, 82m
- 7) Offices, shops, nursery school, etc.
- 8) Sumitomo Mitsui Trust Bank, Ltd.



## 33 Minato Mirai Business Square

- 1) July 2002
- 2) September 2004
- 4) 3,300m<sup>2</sup>
- 5) 29,100m<sup>2</sup>
- 6) 14 stories(2 basements), 60m
- 7) Offices, shops, etc.
- 8) Tokio Marine & Nichido Fire Insurance Co., Ltd.



## 33 MM Park Building

- 1) May 2006
- 2) December 2007
- 4) 6,800m<sup>2</sup>
- 5) 52,000m<sup>2</sup>
- 6) 16 stories(1 basement), 72m
- 7) Offices, shops, etc.
- 8) Japan Real Estate Investment Corporation



## 23 Yokohama Port Museum

- 1) 1987
- 2) March 1989
- Area) 7,200m<sup>2</sup>
- 7) Museum, Yanagihara Art Museum, conference room (Training center), etc
- 8) Yokohama city



## 25 The Landmark Tower Yokohama

- 1) March 1990
- 2) July 1993(hotel: September 1993)
- 4) 38,000m<sup>2</sup>
- 5) 393,000m<sup>2</sup>
- 6) High-rise block: 70 stories(3 basements), 296m Low-rise block: 5 stories(7 stories in one section) and 4 basements
- 7) High-rise block: Offices, Yokohama Royal Park Hotel(603 guest rooms), observation lounge/Sky Garden, etc. Low-rise block: Shops, Landmark Hall(510 seats), Dockyard Garden, etc.
- 8) Mitsubishi Estate Co., Ltd.



## 24 Queen's Square Yokohama

- 1) February 1994 2) July 1997(hotel: August 1997)
- 4) 44,400m<sup>2</sup> 5) 496,000m<sup>2</sup>
- 6) Structure Tower A: 36 stories(5 basements), 172m Tower B: 28 stories(5 basements), 138m Tower C: 21 stories(5 basements), 109m Hotel tower: 25 stories(5 basements), 105m
- 7) Towers A, B and C: Offices, pedestrian malls, galleries, commercial facilities(MINATOMIRAI TOKYU SQUARE), restaurants, Yokohama Minato Mirai Hall, etc. Hotel tower: Yokohama Bay Hotel Tokyu(480 guest rooms), restaurants, etc.
- 8) Sumitomo Mitsui Trust Bank, Ltd. Mitsubishi Estate Co., Ltd., JGC HOLDINGS Corp., Yokohama city



## 26 CROSS GATE

- 1) April 1998
- 2) October 2000
- 4) 3,300m<sup>2</sup>
- 5) 37,000m<sup>2</sup>
- 6) 25 stories(2 basements), 100m
- 7) Offices, shops, Yokohama Sakuragicho Washington Hotel(553 guest rooms), etc.
- 8) ORIX JREIT Inc.



## 27 FUJISOFT Building

- 1) April 2002
- 2) March 2004
- 4) 2,800m<sup>2</sup>
- 5) 30,000m<sup>2</sup>
- 6) 21 stories(2 basements), 105m
- 7) Offices, shops, galleries, etc.
- 8) FUJISOFT Inc.



## 28 HULIC Minatomirai

- 1) September 2007
- 2) March 2010
- 4) 10,800m<sup>2</sup> 5) 105,900m<sup>2</sup>
- 6) 19 stories(1 basement), 94m
- 7) Shops, New Otani Inn Yokohama Premium(240 guest rooms), offices, cinema complex, etc.
- 8) Sumitomo Mitsui Trust Bank, Ltd., Hulic Co., Ltd.



## 27 Yokohama Sakuragi Post Office

- 1) April 1996
- 2) April 1997
- 4) 1,100m<sup>2</sup>
- 5) 6,700m<sup>2</sup>
- 6) 7 stories, 34m
- 7) Post office
- 8) Japan Post Co., Ltd.



## 29 Kenminkyosai Plaza Building

- 1) May 2002
- 2) March 2004
- 4) 1,600m<sup>2</sup>
- 5) 16,000m<sup>2</sup>
- 6) 14 stories(2 basements), 70m
- 7) Offices, Kenmin Kyosai MIRAI HALL(300 seats), etc.
- 8) Kanagawa Kenminkyosai Consumer Cooperative



## 30 Bank of Yokohama Head Office Building

- 1) December 1990 2) September 1993
- 4) 8,000m<sup>2</sup> 5) 86,000m<sup>2</sup>
- 6) High-rise block: 28 stories (3 basements), 152m Low-rise block: 4 stories
- 7) High-rise block: offices, shops, etc. Low-rise block: Hamagin Hall Via Mare (517 seats), etc.
- 8) The Bank of Yokohama, Ltd.



## 30 Nisseki Yokohama Building

- 1) July 1994
- 2) July 1997
- 4) 6,600m<sup>2</sup> 5) 75,000m<sup>2</sup>
- 6) 30 stories(2 basements), 133m
- 7) Offices, shops, Nisseki Yokohama Hall (400 seats), gas station, etc.
- 8) Mitsubishi UFJ Trust and Banking Corp.
- 9) ENEOS Real Estate Corporation



## 31 Minato Mirai 21 District Heating and Cooling Center Plant

- 1) December 1987
- 2) February 1989
- 4) 3,900m<sup>2</sup>
- 5) 11,000m<sup>2</sup>
- 6) 6 stories(1 basement), 44m
- 7) Heat supply plant, offices.
- 8) Minato Mirai 21 District Heating and Cooling Co., Ltd.




## 42 MM Grand Central Tower

- 1) January 2009
- 2) January 2012
- 4) 13,000m<sup>2</sup>
- 5) 114,500m<sup>2</sup>
- 6) 26 stories(2 basements), 120m
- 7) Offices, shops, etc.
- 8) Sumitomo Mitsui Trust Bank, Ltd.



## 44 THE WESTIN YOKOHAMA The Apartment Bay YOKOHAMA

- 1) November 2019
- 2) Jun 2022
- 4) 9,600m<sup>2</sup> 5) 65,800m<sup>2</sup>
- 6) 23 stories, 100m
- 7) THE WESTIN YOKOHAMA (373 guest rooms), The Apartment Bay YOKOHAMA(201 guest rooms), etc.
- 8) Sekisui House, Ltd.



## 46 Yokohama Blue Avenue

- 1) September 2007
- 2) December 2009
- 4) 5,900m<sup>2</sup>
- 5) 52,000m<sup>2</sup>
- 6) 17 stories(2 basements), 85m
- 7) Offices, shops, etc.
- 8) Mizuho Trust & Banking Co., Ltd.



## 46 YOKOHAMA i-MARK PLACE

- 1) December 2012
- 2) May 2014
- 4) 11,500m<sup>2</sup>
- 5) 97,200m<sup>2</sup>
- 6) 14 stories, 65m
- 7) Offices, shops, etc.
- 8) Mizuho Trust & Banking Co., Ltd. (Shimizu Corporation)



## 46 Yokohama Nomura Building

- 1) March 2015
- 2) June 2017
- 4) 9,000m<sup>2</sup>
- 5) 82,000m<sup>2</sup>
- 6) 17 stories, 89m
- 7) Offices, shops, etc.
- 8) Mitsubishi UFJ Trust and Banking Corporation, Nomura Real Estate Development Co., Ltd.



## 31 Minato Mirai 21 Clean Center

- 1) April 1988
- 2) May 1991
- 4) 2,000m<sup>2</sup>
- 5) 6,700m<sup>2</sup>
- 6) 7 stories(1 basement), 40m
- 7) Office
- 8) Yokohama city



## 32 Keiyu Hospital

- 1) February 1993
- 2) January 1996
- 4) 8,000m<sup>2</sup>
- 5) Existing building: 34,500m<sup>2</sup> Extension building: 900m<sup>2</sup>
- 6) 13 stories(3 basements), 60m
- 7) Clinic facilities(410 beds), restaurant, shops, etc.
- 8) Kanagawa Keiyu Foundation



## 32 Kanagawa Prefectural Police Minatomirai Koban

- 1) November 1998
- 2) March 2000
- 4) 600m<sup>2</sup>
- 5) 1,400m<sup>2</sup>
- 6) 4 stories(2 basements), 20m
- 7) Police station, etc.
- 8) Kanagawa Prefectural Government



## 47 KT building

- 1) December 2017 2) March 2020
- 4) 8,700m<sup>2</sup> 5) 37,000m<sup>2</sup>
- 6) 15 stories(1 basement), 81m
- 7) Koei Tecmo Games Co., Ltd. HQ, YOKOHAMA TOKYU REI HOTEL (234 guest rooms), hall(KT Zepp Yokohama)(2,146 seats(standing)), shops, etc.
- 8) KOEI TECMO GAMES CO., LTD.



## 47 Murata Manufacturing Minato MIRAI Innovation Center

- 1) May 2018
- 2) December 2020
- 4) 7,400m<sup>2</sup>
- 5) 65,000m<sup>2</sup>
- 6) 18 stories(2 basements), 100m
- 7) Offices, research and development laboratories, Mulabot, etc.
- 8) Murata Manufacturing Co., Ltd.



## 49 Shincron Head Office / The Annex

- 1) February 2013(The Annex)
- 2) October 2014(The Annex) (nursery school: July 2014)
- 4) 3,000m<sup>2</sup>(Head Office & the Annex) 5) 14,000m<sup>2</sup>(Head Office & the Annex)
- 6) 7 stories(1 basement), 40m(The Annex)
- 7) Offices, nursery school, etc.(The Annex)
- 8) Shincron Co., Ltd.



Concentration of diverse functions through development of city blocks

# Central District

## 52 MinatoMirai21 Central District Block 52 Development Project(\*)

- 1) February 2024
- 3) May 2027 (scheduled)
- 4) 11,800m<sup>2</sup> 5) 115,000m<sup>2</sup>
- 6) 29 stories (2 basements), 180m
- 7) Offices, open innovation space, game art museum, shop, etc.
- 8) DK MinatoMirai Block 52 Specified Purpose Company, KOYU Corporation



## 53 YOKOHAMA SYMPHOSTAGE

- 1) April 2021 3) March 2024 4) 20,600m<sup>2</sup>
- 5) 183,000m<sup>2</sup> 6) 30 stories, 160m
- 7) Offices, shops, open innovation space, KEIKYU EX HOTEL MINATOMIRAI YOKOHAMA (150 guest rooms), etc.
- 8) OBAYASHI CORPORATION, Keikyu Corporation, NIPPON STEEL KOWA REAL ESTATE CO., LTD., Yamaha Corporation, MINATOMIRAI 53 EAST LLC.



## 54 YOKOHAMA GRANGATE

- 1) August 2017
- 2) April 2020
- 4) 13,500m<sup>2</sup>
- 5) 101,000m<sup>2</sup>
- 6) 19 stories, 98m
- 7) Offices, shops, conference hall, etc.
- 8) Mitsubishi UFJ Trust and Banking Corporation, SHIMIZU CORPORATION



## 55-1 LG YOKOHAMA INNOVATION CENTER

- 1) June 2019
- 2) March 2022
- 4) 4,000m<sup>2</sup>
- 5) 35,900m<sup>2</sup>
- 6) 16 stories (2 basements), 90m
- 7) Research and Development Laboratories, offices, YUMESAKI GALLERY, etc.
- 8) LG Holdings Japan Inc.



## 55-2 Minato Mirai Academy Building

- 1) June 2015
- 2) August 2016
- 4) 3,600m<sup>2</sup>
- 5) 11,000m<sup>2</sup>
- 6) 8 stories, 33m
- 7) School, dental clinic, Mirai Museum of Art, shops, etc.
- 8) Minatomirai Academy



## 56-1 Keikyu Group Headquarters

- 1) July 2017
- 2) September 2019
- 4) 3,600m<sup>2</sup>
- 5) 25,800m<sup>2</sup>
- 6) 18 stories (1 basement), 86m
- 7) Offices, KEIKYU Museum, nursery school, etc.
- 8) Keikyu Corporation



## 56-2 Shiseido Global Innovation Center (S/PARK)

- 1) October 2016
- 2) April 2019
- 4) 6,500m<sup>2</sup>
- 5) 56,000m<sup>2</sup>
- 6) 16 stories (1 basement), 77m
- 7) Offices, laboratories, shop, etc.
- 8) Shiseido Co., Ltd.



## 58 Yokohama Gate Tower

- 1) April 2019 2) March 2022
- 4) 9,300m<sup>2</sup>
- 5) 84,000m<sup>2</sup>
- 6) 21 stories (1 basement), 110m
- 7) Offices, shops, KONICA MINOLTA PLANETARIA YOKOHAMA, etc.
- 8) KAJIMA Corp., SUMITOMO LIFE INSURANCE Co., Mitsui Sumitomo Insurance Co., Ltd.



## 59-A OK Minatomirai Building

- 1) December 2014
- 2) September 2016
- 4) 6,900m<sup>2</sup>
- 5) 49,000m<sup>2</sup>
- 6) 11 stories, 52m
- 7) Offices, shops, etc.
- 8) OK Corporation



## 59-B PRYME COAST MINATOMIRAI

- 1) January 2015 2) June 2017
- 4) 9,100m<sup>2</sup> (including condominiums)
- 5) 61,800m<sup>2</sup> (including condominiums)
- 6) 21 stories (1 basement), 80m
- 7) The square hotel Yokohama Minatomirai (232 guest rooms), shops, etc.
- 8) Okada Building Inc. Mitsubishi UFJ Trust and Banking Corporation



## 60-61 Music Terrace (K-Arena Yokohama-Hilton Yokohama)

- 1) August 2020 2) Sep 2023
- 4) 31,800m<sup>2</sup> 5) 118,400m<sup>2</sup>
- 6) 28 stories, 100m
- 7) Arena tower: K-Arena Yokohama (20,033 seats)
- Hotel tower: Hilton Yokohama (339 guest rooms)
- Office tower: K-Tower Yokohama
- 8) Ken Corporation Ltd.



## 60-61 Linkage Terrace Project(\*)

- 1) March 2026 (scheduled) 3) West tower: August 2028 (scheduled) East tower: February 2029 (scheduled)
- 4) 23,000m<sup>2</sup> 5) West tower: 25,000m<sup>2</sup> East tower: 130,000m<sup>2</sup>
- 6) West tower: 13 stories (1 basement), 64m
- East tower: 27 stories (1 basement), 100m
- 7) East tower: Offices, hotel, museum, shops. West tower: school, etc.
- 8) Ken Corporation Ltd., SMFL MIRAI Partners Co., Ltd., KAJIMA CORPORATION, EDUCATIONAL FOUNDATION IWASAKI GAKUEN



## 61 Yokohama Anpanman Children's Museum

- 1) March 2018
- 2) July 2019
- 4) 5,700m<sup>2</sup>
- 5) 14,000m<sup>2</sup>
- 6) 4 stories, 18m
- 7) Galleries, shops, etc.
- 8) Nippon Television Music Corporation
- 9) ACM Corporation



## 62 HARBOR EDGE PROJECT(\*)

- 1) July 2025 (scheduled)
- 3) September 2028 (scheduled)
- 4) 22,000m<sup>2</sup> 5) 88,500m<sup>2</sup>
- 6) 14 stories (1 basements), 60m
- 7) Hotel & hotel condominium, digital aquarium, museum, commercial facilities, etc.
- 8) Berjaya Yokohama Hospitality Asset Tokutei Mokuteki Kaisha



## 63 FUJIFILM Business Innovation Japan Corp.

- 1) March 2008
- 2) April 2010
- 4) 15,000m<sup>2</sup>
- 5) 135,300m<sup>2</sup>
- 6) 20 stories (1 basement), 100m
- 7) Offices, etc.
- 8) FUJIFILM Business Innovation Japan Corp.



## 66 Nissan Motor Co., Ltd., Global Headquarters

- 1) January 2007
- 2) August 2009
- 4) 10,000m<sup>2</sup>
- 5) 92,300m<sup>2</sup>
- 6) 22 stories (2 basements), 100m
- 7) Offices, galleries, etc.
- 8) Nissan Motor Co., Ltd.



## 67 YOKOHAMA MITSUI BUILDING

- 1) October 2009
- 2) March 2012
- 4) 7,800m<sup>2</sup>
- 5) 90,200m<sup>2</sup>
- 6) 30 stories (2 basements), 153m
- 7) Offices, HARA Model Railway Museum, shops, etc.
- 8) Mitsui Fudosan Co., Ltd.



## Yokohama Minato Mirai 21

### High-rise urban residential accommodation

\*8) is the operating body at the time of completion

## 32 BRANZ TOWER Minatomirai

- 1) October 2014
- 3) February 2017
- 4) 3,000m<sup>2</sup>
- 5) 26,500m<sup>2</sup>
- 6) 29 stories (1 basement), 100m
- 7) Condominiums (total units: 228), shops, etc.
- 8) Tokyu Land Corporation

## 39 M. M. TOWERS

- 1) September 2000 3) October 2003
- 4) 16,300m<sup>2</sup> 5) 116,200m<sup>2</sup>
- 6) Three towers, 30 stories (1 basement), 100m
- 7) Condominiums (total units: 862), shops, etc.
- 8) Mitsubishi Estate Co., Ltd., Maeda Corporation

## 40 M. M. TOWERS FORESIS

- 1) November 2004
- 3) February 2008
- 4) 20,600m<sup>2</sup> 5) 155,100m<sup>2</sup>
- 6) Two towers, 30 stories (1 basement), 100m
- 7) Condominiums (total units: 1,206)
- 8) Mitsubishi Estate Co., Ltd., Tokyu Corp., Mitsubishi Logistics Corp.

## 41 M. M. MID SQUARE

- 1) May 2005 3) June 2007
- 4) 10,000m<sup>2</sup> 5) 82,000m<sup>2</sup>
- 6) 31 stories (1 basement), 100m
- 7) Condominiums (total units: 650), shops, nursery school, cinema, etc.
- 8) LAND Co., Ltd., ORIX Real Estate Corporation, Tokyu Land Corporation, MITSUI & CO., LTD

## 50 Pacific Royal Court Minatomirai

- Ocean Tower
- 1) August 2005
- 3) November 2007
- 4) 5,000m<sup>2</sup> 5) 45,600m<sup>2</sup>
- 6) 29 stories (1 basement), 100m
- 7) Rental apartments (total units: 412), shops, etc.
- 8) DH Kaihatsu Minatomirai Co., Ltd.

## ■ Urban Tower

- 1) February 2006
- 3) June 2008
- 4) 5,000m<sup>2</sup> 5) 45,900m<sup>2</sup>
- 6) 29 stories (1 basement), 100m
- 7) Rental apartments (total units: 415), shops, etc.
- 8) PD Minatomirai Special Purpose Co., Ltd.

## 50 Brilia Grande Minatomirai

- 1) February 2005
- 3) November 2007
- 4) 8,000m<sup>2</sup>
- 5) 73,700m<sup>2</sup>
- 6) Two towers, 30 stories (1 basement), 100m
- 7) Condominiums (total units: 555), shops, etc.
- 8) Co-op Tokyo Jyutaku kyokyu Center, etc.

## 59-B BLUE HARBOR TOWER Minatomirai

- 1) January 2015 3) March 2017
- 4) 9,100m<sup>2</sup> (including hotel, shops, etc.)
- 5) 61,800m<sup>2</sup> (including hotel, shops, etc.)
- 6) 27 stories (1 basement), 98m
- 7) Condominiums (total units: 355), shops, etc.
- 8) Okada Building Inc. (Condominium seller: KINTETSU REAL ESTATE Co., Ltd., Mitsui Fudosan Residential Co., Ltd.)

# Shinko District

(Legend) 00 00 City block Nos. ※ "○" marks indicated provisional facilities CASBEE CASBEE Yokohama S rank

ZEB Evaluation of ZEB Under construction Planned 1) Start of work 2) Open 3) Complete 4) Site area 5) Floor space 6) Structure 7) Facilities 8) Developers 9) Operator (\*) Provisional name



## 1 Yokohama Maritime Disaster Prevention Base

- 1) 1991
- 2) Land facilities: April 1995
- Marine facilities: March 1996
- 4) 27,000m<sup>2</sup> 5) 13,300m<sup>2</sup>
- 6) 4 stories (1 basement)
- 7) Offices, training facilities, maritime facilities, Japan Coast Guard Museum Yokohama, etc.
- 8) Japan Coast Guard



## 2 Aka-Renga Soko

- Renovation initiated) June 1994
- 2) April 2002 4) 14,000m<sup>2</sup>
- 8) Yokohama city



- Warehouse No.1 (cultural, etc.)
- 5) 6,000m<sup>2</sup>
- 6) 3 stories, 18m
- Constructed) 1908-1913
- 7) Multipurpose hall, multipurpose space, shops, etc.
- 9) Yokohama Arts Foundation

- Warehouse No.2 (commercial)
- 5) 11,300m<sup>2</sup>
- 6) 3 stories, 18m
- Constructed) 1907-1911
- 7) Restaurants, shops, etc.
- 9) YOKOHAMA AKARENGA, Inc.

- Event Square
- Area) 6,500m<sup>2</sup>
- 7) Outdoor event space
- 9) YOKOHAMA REDBRICK WAREHOUSE JOINTVENTURE

## 4 MARINE & WALK YOKOHAMA

- 1) October 2014
- 2) March 2016
- 4) 7,100m<sup>2</sup> 5) 13,400m<sup>2</sup>
- 6) 2 stories (partially 5 stories) (1 basement), 20m
- 7) Shops, wedding hall, etc.
- 9) Sumitomo Mitsui Trust Bank, Ltd.



## 6-1 SHINKO PIER CRUISE TERMINAL (YOKOHAMA HAMMERHEAD)

- 1) June 2018 2) October 2019 4) 17,400m<sup>2</sup> 5) 30,290m<sup>2</sup>
- 6) 5 stories, 20m
- 7) CIQ Hall, commercial facilities (HAMMERHEAD SHOP & RESTAURANT), Inter Continental Yokohama Pier 8 (173 guest rooms).
- 8) SHINKO PIER CRUISE TERMINAL Co., Ltd.



## 9 Yokohama Shinko Government Office Building

- 1) February 2021 2) May 2023
- 4) 16,825m<sup>2</sup> 5) 48,235m<sup>2</sup>
- 6) 7 stories, 35m
- 7) Joint Government Building, parking, etc.
- 8) YOKOHAMA SHINKOU PARTNERS Co., Ltd. (PFI Operator)



## 10 DREAM DOOR YOKOHAMA HAMMERHEAD

- 1) January 2021 2) August 2021
- 4) 3,000m<sup>2</sup> 6) 2 stories
- 7) Glamping facilities, cafes, walking trails, rest and observation decks, promenade deck, etc.
- 8) SOULPLANET Co., Ltd.



## 11-1 JICA Yokohama

- 1) November 2000 2) December 2002
- 4) 4,500m<sup>2</sup> 5) 16,000m<sup>2</sup>
- 6) 8 stories (1 basement), 36m
- 7) JICA Plaza, training/lodging facilities (108 rooms), libraries, Library of Emigration, etc.
- 8) Japan International Cooperation Agency (JICA)



## 11-2 THE GRAND ORIENTAL MINATOMIRAI

- 1) November 2012
- 2) November 2013
- 4) 4,000m<sup>2</sup>
- 5) 7,200m<sup>2</sup>
- 6) 6 stories, 31m
- 7) Wedding hall, cafe, restaurant, etc.
- 8) BP Co., Ltd.



## 11-2 Audi Minato Mirai

- 1) October 2012 2) August 2013
- 4) 4,500m<sup>2</sup> 5) 5,600m<sup>2</sup>
- 6) 4 stories, 20m
- 7) Showroom, maintenance workshop, cafe, Audi shop, training facility, etc.
- 8) Audi Japan Sales K.K., Audi Japan K.K.



## 11-2 CUPNOODLES MUSEUM YOKOHAMA

- 1) November 2010 2) September 2011
- 4) 4,000m<sup>2</sup> 5) 10,000m<sup>2</sup>
- 6) 5 stories (1 basement), 26m
- 7) Exhibitions, hands-on attractions, dining facilities, museum shop, etc.
- 8) Ando Foundation, Nissin Foods Holdings



## 11-3 Yokohama Minatomirai Manyo Club

- 1) March 2004
- 2) June 2005
- 4) 4,100m<sup>2</sup> 5) 20,600m<sup>2</sup>
- 6) 8 stories, 31m
- 7) Public baths, open air baths, relaxation space, banquet hall, about 60 guest rooms, etc.
- 8) Manyo Club Co., Ltd.



## 12-14 Yokohama World Porters

- 1) December 1997 2) September 1999
- 4) 20,000m<sup>2</sup> 5) 100,400m<sup>2</sup>
- 6) 6 stories (1 basement), parking block (9 stories), 45m
- 7) Wholesale and retail outlets, cinema complex, offices, conference rooms, etc.
- 8) Yokohama Import Mart Inc.



## 13 Yokohama International Seamen's Center "Navios Yokohama"

- 1) December 1997 2) October 1999
- 4) 4,300m<sup>2</sup> 5) 11,700m<sup>2</sup>
- 6) 10 stories (1 basement), 44m
- 7) 135 guest rooms, restaurants, conference rooms, etc.
- 8) Japan Seamen's Welfare Association



## 15 Yokohama Cosmo World

- 1) October 1997
- 2) March 1999
- 4) 22,700m<sup>2</sup>
- (Including the Central District)
- 7) Amusement park, shops, etc.
- 8) Senyo Kogyo Co., Ltd.



## 16 ANNIVERSAIRE MINATOMIRAI YOKOHAMA

- 1) September 2012
- 2) February 2014
- 4) 18,000m<sup>2</sup>
- 5) 15,500m<sup>2</sup>
- 6) 5 stories, 31m
- 7) Wedding hall, cafe, etc.
- 8) Anniversaire Co., Ltd.



# Yokohama Station East District



## 68 Yokohama Shintosh Building / Yokohama Sky

- Yokohama Shintosh Building
- 1) October 1983 2) September 1985
- 4) 18,000m<sup>2</sup> 5) 185,000m<sup>2</sup>
- 6) 10 stories (3 basements), 55m
- 7) Commercial facilities (Sogo Yokohama Department Store), Shintosh Hall (994 seats), cultural facilities, bus terminal, etc.
- 8) Yokohama Shintosh Center Inc., Yokohama Sky Building Co., Ltd.

- Yokohama Sky
- 1) February 1994
- 2) September 1996
- 4) 7,600m<sup>2</sup>
- 5) 102,000m<sup>2</sup>
- 6) 30 stories (3 basements), 132m
- 7) Commercial facilities (Marui, etc.), offices, YCAT, etc.
- 8) Yokohama Sky Building Co., Ltd., Yokohama Shintosh Center Inc.



Concentration of diverse functions through development of city blocks

## Minato Mirai 21 District Area Management



Contribute to the Growth of Yokohama



General Incorporated Association Yokohama Minato Mirai 21 (YMM) was established in April 2009 by local landowners, building owners, facilities managers, etc. to conduct area management activities for maintaining and enhancing the appeal and value of the entire locale. (143 committee members, March 2024)

By consolidating a wide range of functionality in the shape of business and commercial facilities, urban housing, corporate R&D (research and development) facilities, and large-scale facilities for attracting customers, area management activities are generating vitality and prosperity. Activities are currently being advanced in four programs, and various entities will implement a diverse range of initiatives geared to ensure that Minato Mirai continues to be an attractive area into the future.

## Urban Development and Coordination Activities

Initiatives are advanced to enhance Minato Mirai's safety, security, convenience, and comfort. Moreover, adjustments for realizing attractive urban development are being advanced to ensure that the area remains responsive to the changing times.

## Administration of the Basic Agreement on Town Development Under Minato Mirai 21

In Central blocks, based on the Basic Agreement on Town Development Under Minato Mirai 21 (see page 7), stakeholders discuss and coordinate efforts and ideas geared to promoting initiatives for realizing a more attractive and balanced district. To flexibly respond to various needs arising in line with the changing times and realize urban development with an eye to the future, various standards, guidelines, etc. are compiled to supplement the Basic Agreement.



Minato Mirai 21 District Joint Emergency Response Drill

## Promotion of countermeasures against earthquakes and other disasters

The Disaster Prevention Area Management Promotion Committee was created as an organization where regional businesses can cooperate together, with facilities within Minato Mirai 21 working together to protect and preserve each other and realize a district that is stronger and more reassured in the face of natural disasters. It has included such undertakings as enhancing the information communication network and promoting plans to help those unable to immediately return home after a disaster.

### Urban Reconstruction Safety Establishment Plan

Based on the Act on Special Measures Concerning Urban Reconstruction, the Urban Reconstruction Safety Establishment Plan, which compiles the findings of the Disaster Prevention Area Management Promotion Committee, has been prepared. This provides a template for advancing initiatives that are geared toward securing the safety of district residents in the event of a disaster.



### Registration System for Temporary Stay Facilities for People Unable to Get Home

When the Great East Japan Earthquake occurred (March 11, 2011), many people were unable to get home. In light of this experience, businesses in Minato Mirai 21 are connecting and collaborating to create a unique system for registering temporary stay facilities for people who are unable to get home. (Registered facilities as of March 2024: 32)

### Minato Mirai 21 Assistance Guide: How to Get Home in the Event of a Disaster

A guide has been created in four languages that explains the sequence of events from the occurrence of an earthquake to getting back home (and including a map of temporary stay facilities for people unable to return home), with the intention of keeping visitors and people working in Minato Mirai 21 from panicking in the case of an emergency.



## Public Spaces and Urban Design Initiatives

Public spaces in Minato Mirai 21 such as parks, green areas, common spaces, and activity floors, are used to operate open cafes, food trucks, etc. and various events and demonstrations geared to building community formation and bringing life and energy to the area.



Open cafe (MARK IS minatomirai) Food truck (Minatomirai Center Building)

## Environmental Measure Activities

A diverse and wide range of activities, both hard and soft, are implemented to address various environmental issues including global warming, the formation of a recycling-oriented society, and biodiversity. Also, cutting-edge technologies are utilized in promoting initiatives for realizing a smart urban environment aimed at constructing the traffic environment and enhancing the quality of activities.

### Carbon Neutral Initiatives

Minato Mirai was selected as a "Carbon Neutral Pilot District" by the Ministry of the Environment in April 2022. Making Minato Mirai an urban decarbonization model based on cooperation between the public and private sectors aims to achieve net zero CO<sub>2</sub> emissions from electricity consumption in the consumer sector by 2030. To realize this target, various measures including the introduction of renewable energy sources inside and outside of the area, and the promotion of energy management, and the reduction and utilization of wastes, are advanced in a joint effort with local businesses.



### Initiatives for Improving the Water Environment

As initiatives related to improving the water environment and biodiversity in water-access areas, aquatic biological research, water quality surveys, and the like are conducted in Kishamichi Promenade. Survey activities and conditions in the sea are introduced on a website. By collaborating with the water environment initiatives being conducted in Rinko Park, Takashima Suisaisen Park, etc., it is intended to deploy strategies over the entire district.



Biological observation survey



Water quality, etc. measurements

### "Greenery and Flowers" Promotion Initiatives

In addition to a year-round "greenery and flowers" campaign in Sakuragicho Station Square, initiatives are conducted in collaboration with "Garden Necklace Yokohama", while tree nameplates are established and managed inside the district. Moreover, by planting more "greenery and flowers" in public spaces and common spaces that attract a lot of pedestrians, efforts are being made to add more color to Minato Mirai 21 district.



Tree planting in Sakuragicho Station Square

### Promotion of a smart city

In 2019, Minato Mirai 21 was designated as a key business promotion project under the Ministry of Land, Infrastructure, Transport, and Tourism's Smart City Model Program. Efforts to realize a smart city are being implemented by striving for carbon neutrality and building a smart urban environment over the entire district.

### Promotion of Rapid Establishment of 5G Network

Efforts are underway to promptly establish a 5G network as the platform for supporting the smart city.

Movement inside and outside the district (red arrow)  
Movement within the district (blue arrow)

### Living in the future transport environment



### Promotion of smart mobility

We have created the Smart Mobility Consideration Committee, formed of companies from within Minato Mirai 21 and those involved in transportation, and are involved in activities to improve the circulation of traffic inside the city and increase access to the surrounding areas.

### Personal Mobility Demonstration Experiments

Demonstration experiments have been implemented to verify personal mobility sharing, etc. as a means of providing smooth mobility for people traveling over short distances.



Electric scooter sharing service



Sightseeing tour

## Cultural and Promotional Activities

In addition to advertising conditions and activities in Minato Mirai 21 district inside and outside of the district, efforts are made to generate bustle and boost the district's image and appeal.

### Strategy for city tourism and MICE



A variety of new undertakings and strategies were initiated in 2021, with the goal of establishing a global city of tourism and MICE capable of creating a new sustainable future with Yokohama as the gateway. This has led to undertakings to meet with the varied purposes for which people come to the district, including branding, enhancing the communication of information about Minato Mirai 21, addition of further MICE functionality, and the development of content.

### Music Port YOKOHAMA

Minato Mirai 21 has a large-scale music arena, alongside many other high-quality music halls. We have established the "Music Port YOKOHAMA Committee", comprised of those working with these facilities and companies in the music industry, and which is now working toward realizing a city of music in "Music Port YOKOHAMA".

### Art & Museum City

Minato Mirai 21 has a diverse range of high-quality art galleries and museums. Representatives from such facilities gather to discuss and implement promotions and measures for improving access geared to branding Minato Mirai 21 as an "intelligent district of new 'knowledge' and 'insights'".

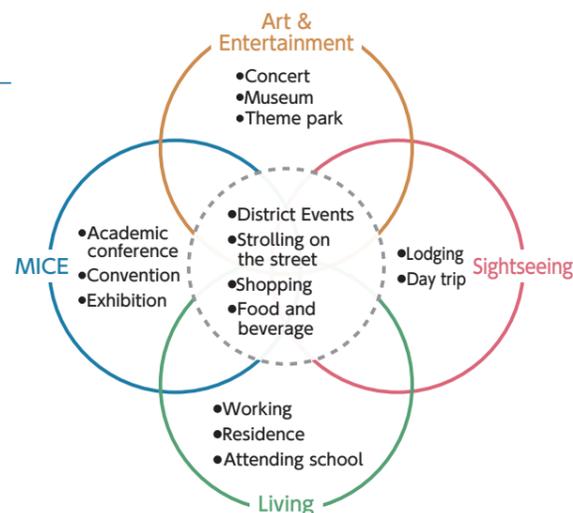

Music Port YOKOHAMA  
MINATO MIRAI STREET MUSIC



Art & Museum tour map

## District Vitalization Activities

By promoting mutual exchanges between local stakeholders, efforts are made to create new networks and vitalize corporate activities in Minato Mirai 21. Also, we aim to enhance the local value and vitality by strengthening links between the district's numerous R&D facilities and thereby encouraging open innovation.

### Promotion of open innovation


We are promoting a technological revolution in Minato Mirai 21, seeking to move beyond the boundaries between organizations and widely share cumulative knowledge and technology during the development of new technologies and products.

### Innovation Creation by Yokohama Future Organization

The Yokohama Future Organization was established in 2021 as a collaboration between industry, academia, and government, seeking to bring innovation to Yokohama, with the participation of many companies from within the district. Its activities got underway in that same year. Through this organization, we are promoting a variety of activities for players from both inside and outside Minato Mirai 21.

### YOXO FESTIVAL

By staging district-wide events that allow visitors to directly experience new technologies and services by companies, universities, etc., the entire community joins in promoting innovation and boosting recognition of Minato Mirai 21 as Yokohama's business area.

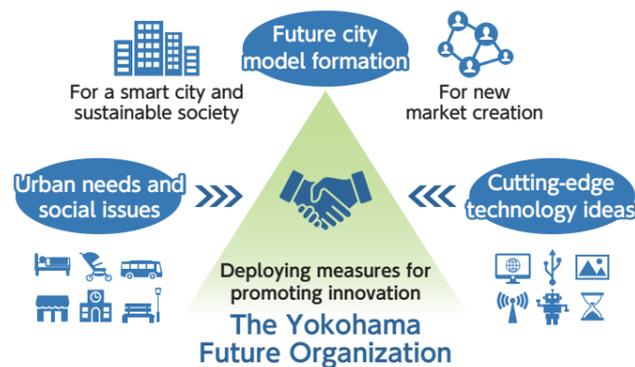

Automated driving demonstration experiment (MACNICA, Inc. automated driving vehicles)



YOXO FESTIVAL

● Start of work / completion / opening of facilities etc. ● Major events ● (\*)Provisional name

1965	Feb.	City of Yokohama announces Redevelopment Plan, one of six major projects
1978	Nov.	Planning and Investigatory Committee for the Overall Improvement of Yokohama Coastal City Center established. Chairman: Yoshinosuke Yasoshima
1979	Dec.	Planning and Investigatory Committee reports its basic plan
1980	Mar.	Decision made to relocate Mitsubishi Heavy Industries, Ltd.'s Yokohama shipyard
1981	July	Interim report on the Master Plan for the Overall Improvement of Yokohama Coastal City Center announced Project Promotion Committee headquarters established
	Oct.	Project officially named Minato Mirai 21
1983	Feb.	Urban plan including land readjustment adopted
	Mar.	Mitsubishi Heavy Industries, Ltd.'s Yokohama shipyard relocated
	Aug.	Decision made to bring sailing ship Nippon-maru to Yokohama
	Nov.	Transport Minister authorizes public water land reclamation Construction Minister authorizes land readjustment for 35.1 ha Work begins on Yokohama Minato Mirai 21 project
1984	Feb.	Cornerstone-laying ceremony for Minato Mirai 21 land reclamation
	July	Yokohama Minato Mirai 21 Corporation established (dissolved March 2009)
1985	Apr.	Part of Nippon-maru Memorial Park opens Sailing ship Nippon-maru opens to public
	Sep.	Yokohama Shintosh Building (SOGO YOKOHAMA) opens
1986	Oct.	Minato Mirai 21 District Heating and Cooling Co., Ltd. Established
1987	June	Pacific Convention Plaza Yokohama Corporation established
	Aug.	Completion of reclamation in Central District Construction Zone No.1 (43 ha) authorized
1988	Apr.	Part of land specified under Minato Mirai 21 Central District land readjustment plan (63.4 ha) provisionally allocated
	July	Minato Mirai 21 Basic Agreement on Town Development concluded
1989	Feb.	Sakuragicho Station Square opens
	Mar.	Minato Mirai 21 District Heating and Cooling Center plant completed Moving walkway completed

Mar.	Yokohama Exotic Showcase (YES '89) held (through October) Yokohama Maritime Museum (now Yokohama Port Museum) opens	
	Part of Rinko Park opens Bijutsunohiroba (Art Square) opens Yokohama Minatomirai Railway Company established	
May	Decision made to use "Minato Mirai" for all street and home addresses in Minato Mirai 21 Central District	
Oct.	Urban plan for Minato Mirai 21 Central District adopted	
Nov.	Yokohama Museum of Art opens (work initiated:1985)	
1990	Apr.	Yokohama Minatomirai Railway Company licensed to operate Minatomirai Line
1991	July	PACIFICO Yokohama (Pacific Convention Plaza Yokohama) opens
	Aug.	Inter Continental Yokohama Grand opens International Tropical Timber Organization (ITTO) locates its headquarters in PACIFICO Yokohama
	Oct.	PACIFICO Yokohama Exhibition Hall opens
	Nov.	Minato Mirai Pukari-sanbashi Pier completed World Teleport Association's 7th general meeting (Teleport Yokohama '91) held
1992	Feb.	The Regional Network of Local Authorities for the Management of Human Settlement (now CITYNET Yokohama Project Office) (CITYNET)'s offices open in PACIFICO Yokohama's Yokohama International Organizations Center
	May	Metropolitan Expressway's Minatomirai Ramp opens for both directions
1993	Feb.	National government approves Yokohama Business Core City Basic Concept
	June	Cable City Yokohama established (dissolved March 2015)
	July	The Landmark Tower Yokohama opens Minato Mirai-odori 1go Footbridge opens
	Sep.	The Bank of Yokohama Head Office Building opens Yokohama Royal Park Hotel Nikko (now Yokohama Royal Park Hotel) opens
1994	Apr.	Kokusai-bashi Bridge (Kokusai-odori Boulevard) opens National Convention Hall of Yokohama opens
	June	Mitsubishi Juko Yokohama Building opens
	Dec.	Bay Shore Route of Metropolitan Expressway opens between Haneda and Yokohama Bay Bridge
1995	Apr.	Yokohama Marine Disaster Prevention Complex completed Reclamation in Shinko District (Ichimonji) authorized (license obtained in 1988)
	Aug.	Minato Mirai 21 District holds first joint disaster-preparedness drill
1996	Jan.	Keiyu Hospital opens
	Sep.	Yokohama Sky opens
	Nov.	Completion of reclamation in former Takashima Yard District (Yohinko-Pool area) authorized (license obtained in 1994)

# History of Minato Mirai 21

● Start of work / completion / opening of facilities etc. ● Major events ● (\*)Provisional name

1997	
Apr.	City plan for Shinko District adopted
	Yokohama Sakuragi Post Office opens
June	Minato Mirai 21 District Heating and Cooling Plant 2 completed
July	Queen's Square Yokohama opens
	Nisseki Yokohama Building opens
	Whole of Minato Mirai-odori Boulevard opens, including temporary two lane zone
	Kishamichi Promenade opens
Aug.	The Pan Pacific Hotel Yokohama (now Yokohama Bay Hotel Tokyu) opens
1998	
Mar.	Completion of reclamation in Shinko District (between breakwaters) authorized (license obtained in 1996)
June	Yokohama Minato Mirai Hall opens (Small Hall opens in February)
1999	
Mar.	Yokohama Cosmo World officially opens
May	Yokohama Media Tower opens. (Telecommunications Towers opens in October)
Sep.	Shinko District opens
	Yokohama World Porters opens
	Unga Park opens
	Part of Aka-Renga Park opens
Oct.	Yokohama International Seamen's Center "Navios Yokohama" opens
Nov.	Grand Mall Park opens
Dec.	Shinko Circle Walk opens
2000	
Mar.	Kanagawa Prefectural Police Minatomirai Koban opens
Oct.	Cross Gate opens
	Yokohama Sakuragicho Washington Hotel opens
2001	
Apr.	Shinko Park (now CUPNOODLES MUSEUM PARK) opens
July	PACIFICO Yokohama's exhibition halls expanded
Sep.	The First Yokohama Triennale held.
2002	
Mar.	Yamashita Rinko Line Promenade opens
	Pedestrian Square in front of Sakuragicho Station completed
Apr.	Yokohama Aka-Renga Soko and Aka-Renga Park open
May	Yokohama hosts 2002 FIFA World Cup (International Media Center established)
Dec.	JICA Yokohama opens
2003	
Sep.	Modification of land readjustment plan authorized (expanded to 101.8ha)
Oct.	M. M. TOWERS completed
2004	
Feb.	Minatomirai Line opens
Mar.	Pier Aka-Renga opens

Mar.	FUJISOFT ABC Building (now FUJISOFT Building) opens
	Kenminkyosai Plaza Building opens
Apr.	Ordinance Concerning Special Assistance Offered to Businesses in Districts Specially Designated for Corporate Business Investment in the City of Yokohama (ordinance for encouraging companies to set up business in the area) takes effect
	Leaf Minatomirai opens
Sep.	Minato Mirai Business Square opens
2005	
June	Yokohama Minatomirai Manyo Club opens
	Shinko Central Park opens
Nov.	25th National Convention for the Development of an Abundantly Productive Sea held
2006	
June	Land readjustment replotting announced
2007	
Feb.	Keihin Port Office, Kanto Regional Development Bureau, Ministry of Land, Infrastructure, Transport and Tourism completed
June	M. M. MID SQUARE completed
July	Takashima-Chuo Park opens
Nov.	Brillia Grande Minatomirai completed
Dec.	MM Park Building opens
2008	
Feb.	M. M. TOWERS FORESIS completed
Apr.	Implementation of Minato Mirai 21 Central District Landscape Plan and Urban Landscape Conference Zone
May	The Fourth Tokyo International Conference on African Development (TICAD IV) held
June	Pacific Royal Court Minatomirai completed
Aug.	Takashima 2-chome Pedestrian Bridge opens
Oct.	Shincron Head Office opens
Dec.	Minato Mirai-hashi Bridge (Kokusai-odori Boulevard) opens
2009	
Feb.	General Incorporated Association Yokohama Minato Mirai 21 re-established
Apr.	Nippon-maru Memorial Park reopens
	EXPO Y150:150th Anniversary of Opening of the Port of Yokohama held (through September)
June	Zou-no-hana Park opens
July	Umi-Festa Yokohama held
	Hamamirai Walk opens
	Water Promenade opens
Aug.	Nissan Motor Co., Ltd., Global Headquarters opens
Dec.	Yokohama Blue Avenue opens
2010	
Jan.	Implementation of Minato Mirai 21 Shinko District Landscape Plan and Urban Landscape Conference Zone
Mar.	TOC Minatomirai (now HULIC Minatomirai) opens
	New Otani Inn Yokohama opens (now New Otani Inn Yokohama Premium)
	Minatomirai-hodokyo Footbridge opens

Apr.	FUJI XEROX R&D SQUARE (now FUJIFILM Business Innovation Japan Corp) opens
June	Minatomirai Center Building opens
Nov.	Asia-Pacific Economic Cooperation Japan 2010 held
2011	
Mar.	Land readjustment completed
May	Takashima Suisaisen Park opens
Sep.	Cupnoodles Museum (now CUPNOODLES MUSEUM YOKOHAMA) opens
Dec.	Designated Future City and Comprehensive Special Zone for International Competitiveness Development
2012	
Jan.	Designated Urban Renaissance Urgent Redevelopment Area
	MM Grand Central Tower opens
Mar.	YOKOHAMA MITSUI BUILDING opens
	Minato Mirai 21 Area Management Charter enacted
2013	
Mar.	Minato Mirai Tunnel opens
June	The Fifth Tokyo International Conference on African Development (TICAD V) held
	MARK IS Minatomirai opens
Aug.	Audi Minato Mirai opens
Nov.	THE GRAND ORIENTAL MINATOMIRAI opens
2014	
Feb.	ANNIVERSAIRE MINATOMIRAI YOKOHAMA opens
Mar.	The 38th Intergovernmental Panel on Climate Change (IPCC) held
Apr.	PRYME GALLERY MINATOMIRAI opens
May	YOKOHAMA i-MARK PLACE opens
Oct.	Shincron Head Office / The Annex opens
2015	
Apr.	Global Learning Center opens
2016	
Mar.	MARINE & WALK YOKOHAMA opens
Aug.	Minato Mirai Academy Building opens
Sep.	OK Minatomirai Building opens
2017	
Feb.	BRANZ TOWER Minatomirai completed
Mar.	BLUE HARBOR TOWER Minatomirai completed
	33rd National Urban Greenery Fair Yokohama held
May	The 50th Asian Development Bank (ADB) Annual Meeting held
June	Yokohama Nomura Building opens
	PRYME COAST MINATOMIRAI opens
Dec.	OCEAN GATE MINATO MIRAI opens
2019	
Apr.	Shiseido Global Innovation Center (S/PARK) opens
July	Yokohama Anpanman Children's Museum opens

Aug.	The Seventh Tokyo International Conference on African Development (TICAD7) held
Sep.	Keikyu Group Headquarters opens
	Holding of the 2019 Rugby World Cup (placement of fan zone)
Oct.	SHINKO PIER CRUISE TERMINAL (YOKOHAMA HAMMERHEAD) opens
	InterContinental Yokohama Pier 8 opens
2020	
Mar.	KT building opens
Apr.	YOKOHAMA TOKYU REI HOTEL opens
	YOKOHAMA GRANGATE opens
	King Mall-kyo Bridge opens
	PACIFICO Yokohama North opens
June	Sakuramirai-hashi Bridge opens
July	PIA ARENA MM opens
Aug.	Hammerhead Park opens
Sep.	YOKOHAMA BAYCOURT CLUB HOTEL & SPA RESORT·THE KAHALA HOTEL & RESORT YOKOHAMA opens
Dec.	Murata Manufacturing Minato MIRAI Innovation Center opens
	Megami-bashi Bridge opens
2021	
Apr.	Kanagawa University Minato Mirai Campus opens
	Metropolitan Expressway Co., Ltd. Kanagawa Bureau opens
	YOKOHAMA AIR CABIN opens
Aug.	DREAM DOOR YOKOHAMA HAMMERHEAD opens
Dec.	the square hotel Yokohama Minatomirai opens
2022	
Mar.	LG YOKOHAMA INNOVATION CENTER opens
	Yokohama Gate Tower opens
Apr.	Designated Decarbonization Leading Area
June	THE WESTIN YOKOHAMA, The Apartment Bay YOKOHAMA opens
	Yokohama Port Museum reopens
Dec.	Yokohama Aka-Renga Soko reopens
2023	
Jan.	Minato Mirai-odori 2go Footbridge opens
Apr.	Yokohama Connect Square opens
May	Mitsui Garden Hotel YOKOHAMA MINATOMIRAI Premier opens
	Yokohama Shinko Government Office Building opens
Sep.	Music Terrace(K-Arena Yokohama-Hilton Yokohama-K-Tower Yokohama) opens
	LIVINGTOWN Minato Mirai opens
2024	
Feb.	Work begins on MinatoMirai21 Central District Block 52 Development Project(*)
Mar.	YOKOHAMA SYMPHOSTAGE completed
	Work begins on RINKO PARK PROJECT(*)
	Hammerhead Walk opens



Distance from main Station		
From Sakuragicho Sta.	To The Yokohama Landmark Tower	300m
From Minatomirai Sta.	To PACIFICO Yokohama	450m
From Bashamichi Sta.	To Aka-Renga Soko	700m
From Shin-takashima Sta.	To Yokohama Sta.	700m

**LEGEND**

- Completed (Orange)
- Under construction (Blue)
- Planned (Purple)
- Provisional facilities (Yellow)
- Parks and greenery (Green)
- Provisional facilities (Planned) (Light Blue)
- Main pedestrian network (Orange dashed line)
- Main pedestrian network (Planned) (Blue dashed line)
- Pedestrian Bridges etc (Grey)
- (\*) Provisional name

① The Circled figures are block numbers.

### Request for Developers/Business Support

The City of Yokohama is accepting proposals for development projects on city-owned land in the Minato Mirai 21 District. There are also support systems that entail tax breaks, subsidies, etc. for corporations that locate in the area.

**[Information on applications from the public]**  
<https://www.yymm21.jp/div/offering.html>

**[Business Support]**  
<https://www.city.yokohama.lg.jp/business/keizai/yuchi/support/seido/>

🔍 Seeking Development Companies (Yokohama Minato Mirai 21 Corporation)

🔍 List of Support for Companies (Business Attraction and Site Division, Economic Affairs Bureau, City of Yokohama)

\*Japanese text only